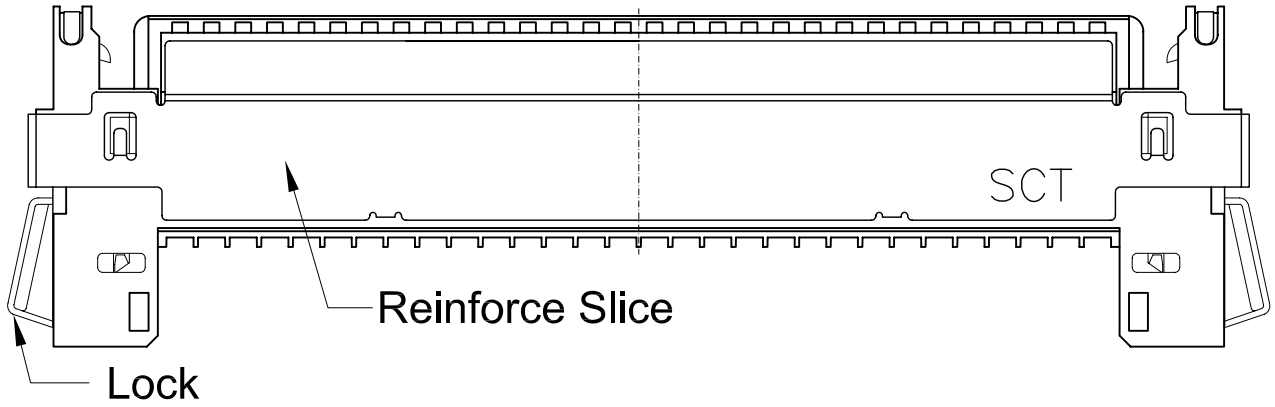




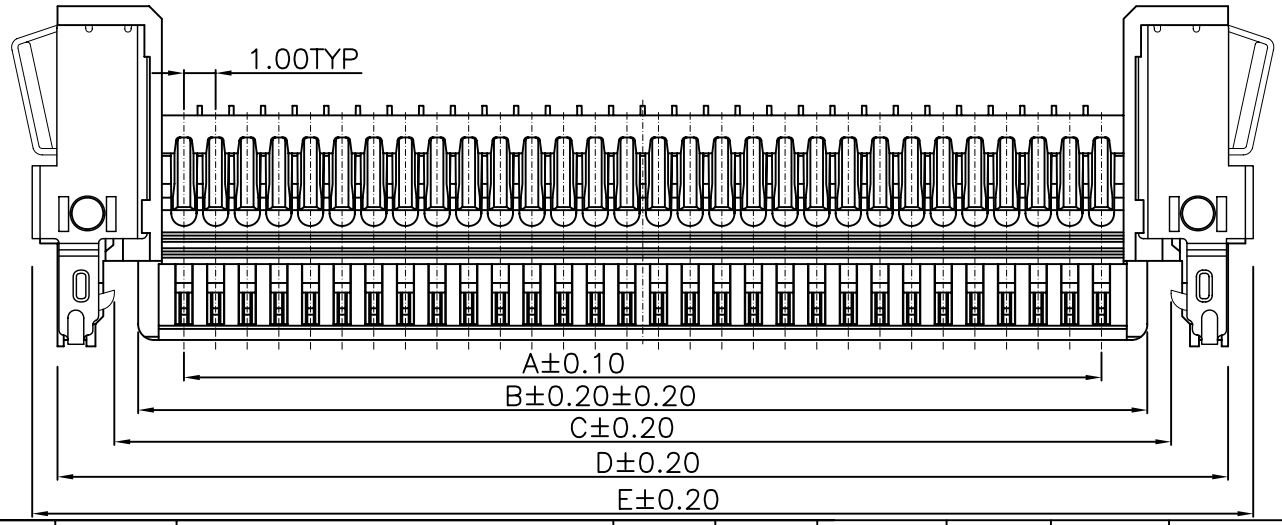


| PART NO | DIMENSION | | | | |
|---|---|---|---|---|---|
| | A | B | C | D | E |
| SCT1005H-20 | 19.00 | 21.90 | 23.30 | 27.00 | 28.60 |
| SCT1005H-30 | 29.00 | 31.90 | 33.30 | 37.00 | 38.60 |

SPECIFICATIONS

Voltage rating: 200V AC,DC
Current rating: 0.5A,AC,DC(AWG#30)
Withstanding Voltage:500V AC/minute
Insulation resistance:100MΩmin
Temperature range:-40°C - +80°C
Contact resistance:20mΩ

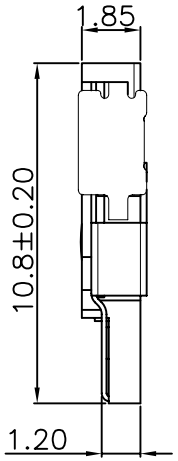


HOUSING

Part No: SCT1005H-XX
Poles: 20,30
Material:Nylon 46,UL94V-0

TERMINAL

Lock: Stainless steel
Reinforce slice: Stainless steel

| REV | DATE | MODIFICATION DESCRIPTION | CHANGE | APPROVE |
|---|---|---|---|---|
| 0 | 05/12/27 | NEW | ——— | ——— |

| OPERATION | |
|---|---|
| ~ 10 | ±0.15 |
| 20 ~ 30 | ±0.30 |
| 30 ~ | ±0.50 |
| Angle | ± 2° |
| DIM | TOL |

| | | |
|---|---|---|
| DRAW | Judy.Huang | 2006/05/02 |
| DESIGN | | |
| CHECK | Micky.Liu | 2006/05/02 |
| APPROVE | Hellen.Li | 2006/05/02 |

| | |
|---|---|
| SCALE | |
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |

SCONDAR 森康达电子有限公司
SCONDAR ELECTRONIC LIMITED

| | |
|---|---|
| PART NO. | SCT1005H-XX |
| TITLE: | FI-X 1.0mm (with lock) |
| DRAWING NO. | SCT1005 |